

For an all-encompassing cinema sound in a conveniently sized package, the Phonix Flat, with its slim flat baffle design, provides an immersive home theatre experience as a side surround, rear surround or ceiling effect speaker.

Best for use in 5.1, 7.1 or Dolby® Atmos™ configurations, this dedicated home cinema speaker offers high power handling with low frequency extension down to 45Hz in a neat 132mm deep package.

The hefty 165mm bass driver has a 33mm voice coil wound on high powered aluminium former, with ventilated spider and aluminium flux stabilisation ring for low distortion. The paper cone and surround of the bass driver have been developed to provide the smoothest possible response and a dynamic and non-fatiguing vocal mid-band.

The high frequency drive unit is a specially-damped, high power, 26mm doped fabric dome tweeter. Combined with the crossover network which has been designed and built using close-tolerance, professional-grade components, the resulting sound is exceptionally smooth and well controlled.

Complete with a braced, critically-damped enclosure, finished with a neat black cloth grille and an optional low profile mounting bracket for wall or ceiling mounting, the Phonix Flat is a versatile new benchmark for surround loudspeaker reproduction.

For the ultimate cinema experience at home, play it through Krix.




## FEATURES


- Immersive surround or ceiling effects
- Easy wall mounting
- Compact, slim design

| Phonix Flat           |  |
|-----------------------|--|
| Frequency Range       | 45 Hz - 20 kHz (in room response)  |
| Power Handling        | 50 - 150 Watts RMS recommended amplifier power   |
| Sensitivity           | 88 dB (2.83V / 1m)   |
| Impedance             | 8 OhmS   |
| Configuration         | 2-Way  |
| Crossover point       | 1.8 kHz  |
| Low Frequency Driver  | Single 165mm (6 1/2") paper cone driver. 33mm (1 1/4") voice coil wound on high powered kapton former, with ventilated magnet assembly and copper shorting ring for low distortion |
| High Frequency Driver | 26mm (1") doped fabric dome with large roll surround. Ferro fluid cooled   |
| Enclosure Type        | Bass reflex, front vented  |
| Input Terminals       | Gold plated binding posts  |
| Dimensions            | 388mm high x 260mm wide x 132mm deep   |
| Net Weight            | 6 kg   |


## DETAILED DIMENSIONS




Top View

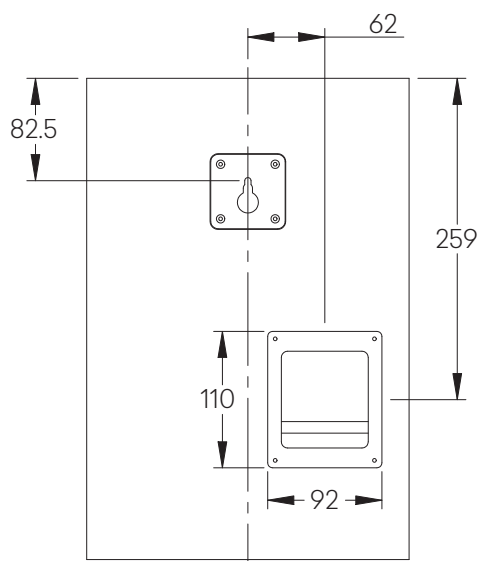

Rear View

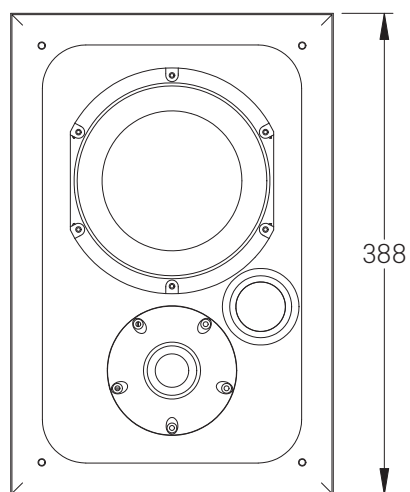

Front View

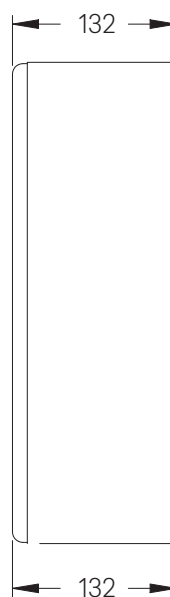

Side View

