

Installation Guide Aquatix and Tropix

Note: The following information should be used in conjunction with the Krix "Owner's Manual".

before you begin

- Select the desired position and orientation for mounting the loudspeaker.

Tips for optimum sound performance:

1. Experiment with speaker placement options before permanently mounting speakers.
2. When used in an outdoor environment it can be beneficial to place speakers near a wall or other solid surface to reinforce bass.
3. Mounting speaker up high and angled down slightly can increase sound coverage.
4. Although these speaker are weather-proof, a position protected from the elements will extend product life.

⚠ Mounting speakers to solid wood or masonry is advisable.

⚠ If deemed necessary, a safety cable may be attached to brass threaded inserts on the back of the enclosure.

⚠ To avoid injury or damage ensure that the fasteners used to mount the bracket will not interfere with any electrical wiring, plumbing, etc. behind the mounting surface.


⚠ Select wall anchors, or screws, appropriate for the desired mounting surface and speaker weight (Aquatix 2.5Kg, Tropix 3.5kg). It is recommended to use two wall anchors per bracket assembly.

standard 'U' bracket installation (supplied with speaker)

- please refer to instructions overleaf -

alternative mounting method

Where an unusual speaker angle is required a custom brackets may be used mount the speaker (eg the Krix Qik5). The custom bracket can be attached to the brass inserts at the rear of the enclosure (figure 1).

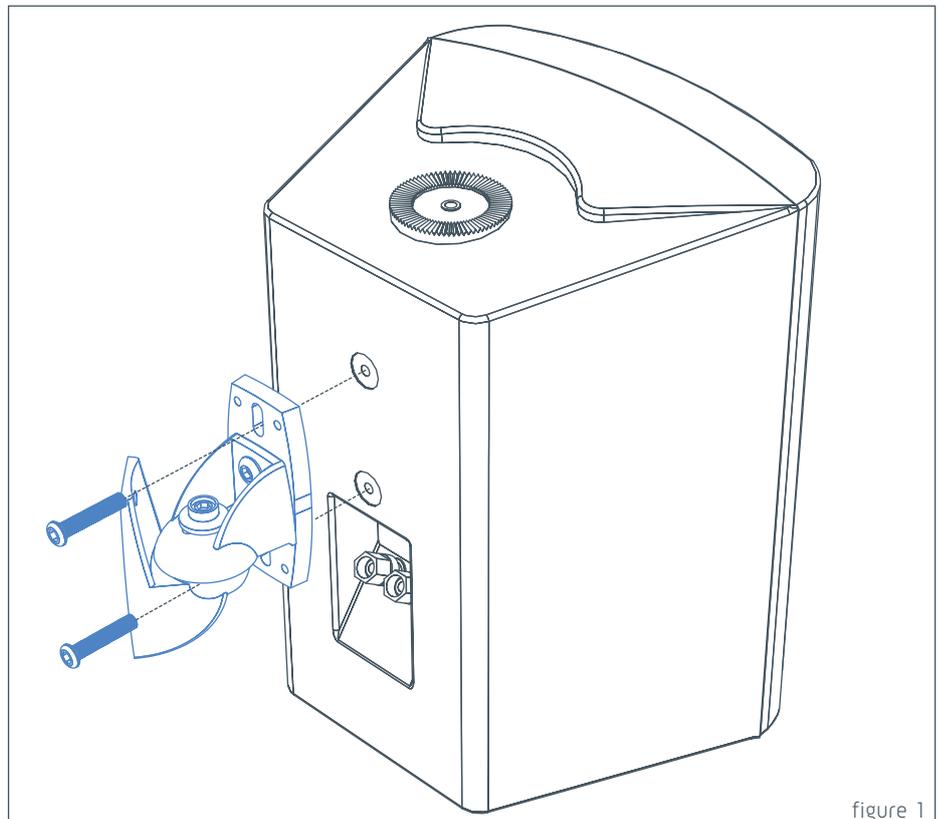

⚠ disclaimer

Drilling into anything can be dangerous. You should make sure you know what is behind or inside the surface that you are drilling before you start to drill. For example, you may strike an electrical cable or a water pipe.

You must use appropriate fixings for the surface that you are fixing to. If you don't, injury or damage may occur.

Each bracket is rated to carry a weight of up to 5kg only.

If you do not feel entirely confident about installing this product, contact a professional installer.

To the extent permissible by law:

All warranties, conditions, representations, promises and statements relating howsoever to this product whether express or implied and whether in contract or tort are excluded to the extent permitted by law; and

Our liability to you under a condition or warranty (if any) implied into this sale and purchase agreement relating to these speakers by the Trade Practices Act 1974 (as amended) or any other law (whether a law of Australia or any other country) other than a condition implied by Section 69 of the said Act is limited at our option to:

- the replacement of the product; or
- the supply of an equivalent product; or
- the repair of the product.

If you do not accept the above conditions, return this product (in the original packaging) with proof of purchase for a full refund.

'U' bracket installation (supplied with speaker)

- Fasten 'U' bracket to surface with screws, bolts, wall anchors (or nails, the least secure method). (figure 2)
- Connect speaker cables. (figure 3)
- Attach speaker to 'U' bracket using bracket knobs. (figure 4)

