

For powerful home cinema sound that is sensitive enough to produce a whisper but controlled enough to reduce distortion on loud on-screen effects, the Ultraphonix is the perfect partner to your home cinema system.

A dedicated home cinema on wall side and rear surround speaker, the Ultraphonix offers high power handling and high sensitivity with low distortion, as well as bass extension down to 40Hz. Replicating the wedge-shaped design used in Krix's commercial cinema surround speakers with a 15-degree baffle, the Ultraphonix can be mounted high and away from the listener to maintain excellent pattern control and audio coverage to all listening positions.

The massive 205mm bass driver featuring a 38mm voice coil has been developed to provide the smoothest possible response with a dynamic and non-fatiguing vocal mid-band. The high frequency drive unit is a specially-damped, high power, 26mm doped fabric dome tweeter that combines with the bass driver via a crossover network that has been designed and built using close-tolerance, professional-grade components, for an exceptionally smooth and well controlled sound.

Complete with an enclosure that is braced, critically-damped, and finished with a neat black cloth grille, this on wall speaker has it all.

For the ultimate cinema experience at home, play it through Krix.




FEATURES


- 15 degree angled baffle
- High sensitivity, very low distortion
- Easy wall mounting

	Ultraphonix
Frequency Range	40 Hz - 20 kHz (in room response)
Power Handling	50 - 200 Watts RMS recommended amplifier power
Sensitivity	90 dB (2.83V / 1m)
Impedance	8 OhmS
Configuration	2-Way
Crossover point	1.8 kHz
Low Frequency Driver	Single 205mm (8") paper cone driver. 38mm (1½") voice coil wound on high powered aluminium former, with ventilated magnet assembly and copper shorting ring for low distortion
High Frequency Driver	26mm (1") doped fabric dome with large roll surround. Ferro fluid cooled
Enclosure Type	Bass reflex, top vented
Input Terminals	Gold plated binding posts
Dimensions	460mm high x 338mm wide x 263mm deep
Net Weight	10 kg


DETAILED DIMENSIONS




Top View

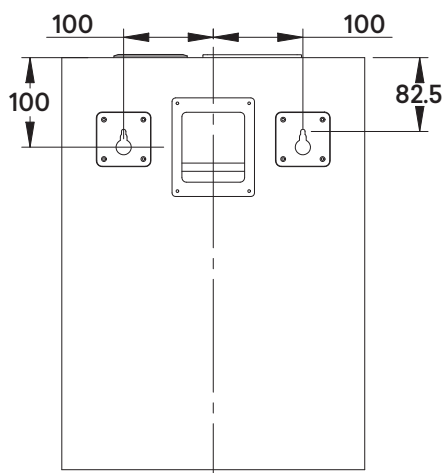

Rear View

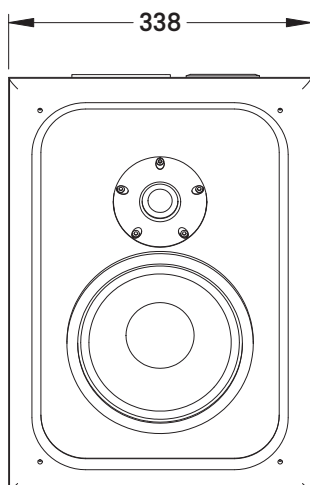

Front View

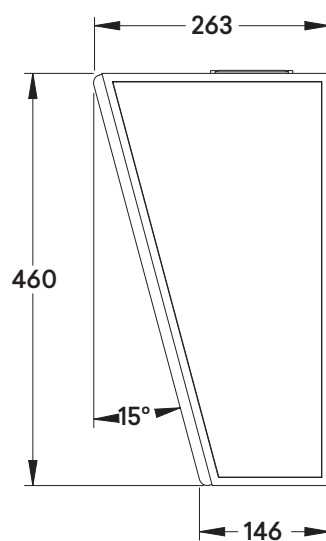

Side View

